


LS-XL10

Level switch for clean water and waste water.

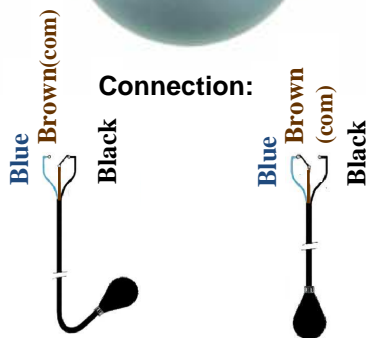

LS-XL10 is a high quality level switch with an intergrated weight and specially suitable for waste water.

- For densities: 0,95-1,10 g/cm³
- Protection index: IP-68
- Material: Polypropylene
- Contact: Switching microswitch, max. 250 VAC/DC, 4 A.
- Temperature range: 0 – 70 °C
- Pressure: Max 2 Bar.
- Dimension: 165 x Ø100 mm.
- Weight: 775 g. (1.500 g. incl. cable)
- Cable length: 10 m.
- Cable: PVC 3 x 0,75 mm², Ø 6,6 mm.

Applications:

- Waste water pump stations
- Water towers and reservoirs
- Lakes and dams
- Industry

Other standard sensors in stock:

- SP-25-Smart (Programmable measure range)
- SP-25 (Good for clean water and waste water)
- SP-16 (Extra thin for boreholes)
- KV-05 (Capacitive overflow level sensor)

Accessories for level switches:

Cable hangers



Connection boxes



Power supplies 24 VDC

